



WHEEL SPEED CONTROL

KICK RAILS AND WHEEL STOPS




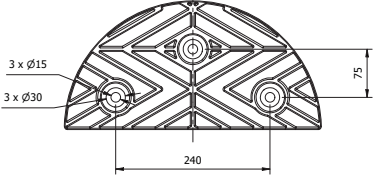



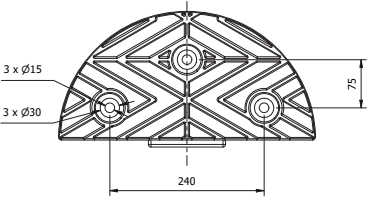


Revision: 9 January 2026 2:40 PM
Boplan reference: WC...

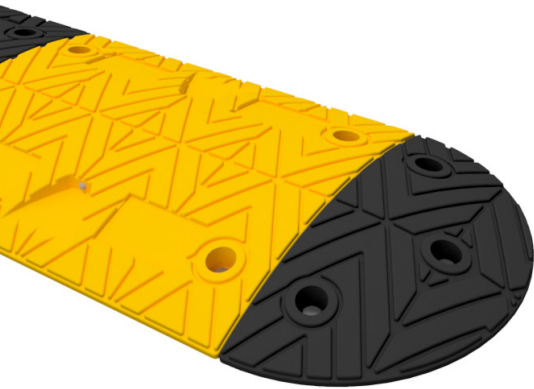

PRODUCT SPECIFICATIONS

APPLICATION		
Environment	Speed limitation Suited for light vehicles Indoor/outdoor use possible With integrated lens reflectors	
Operational temperature	-50°C up to +60°C	
Speed limit	24 km/h	
Axle load capacity	4,5 t per axle, depending on frequency of trucks	
MATERIAL		
Composition	Vulcanized rubber	
Exposure to light	UV resistant	
STANDARD COLOURS		
End part	Black or yellow	
Mid part	Black or yellow	
SIZE AND PROPERTIES		
	End part	Mid part
Overall dimensions	Width: 200 mm Depth: 400 mm Height: 50 mm	Width: 500 mm Depth: 400 mm Height: 50 mm
Weight	2.0 kg	7.8 kg
Number of fixations	3 pcs	4 pcs
Visibility	no reflectors	2 integrated lens reflectors
FIXATIONS (included)		
Type	Hexagon Screw bolt - Ø10 x 110 mm - Zinc coated - SW 17 mm Nylon plug - Drill hole Ø12 mm Washer - Zinc Coated	

REFERENCE LIST - WHEEL SPEED CONTROL

WC0500-2040-EPF01BL	Wheel speed control End part female BLACK		
WC0500-2040-EPF01YE	Wheel speed control End part female YELLOW		
WC0500-2040-EPM01BL	Wheel speed control End part male BLACK		
WC0500-2040-EPM01YE	Wheel speed control End part male YELLOW		
WC0500-5040-MS01BL	Wheel speed control Mid part With 2 lens reflectors BLACK		
WC0500-5040-MS01YE	Wheel speed control Mid part With 2 lens reflectors YELLOW	