


# DOCK BUMPER


## LOADING DOCK BUMPER

Revision: 29 April 2026 8:32 AM  
Boplan reference: DB1450-0250-100BL



### PRODUCT SPECIFICATIONS

APPLICATION			
Environment	Robust, wear resistant bumper for dock protection during loading and unloading of trucks.		
Use	In and outdoor		
Operational temperature	-30°C up to +40°C		
Advisory speed	Walking speed of manoeuvring / backwards driving trucks		
PROPERTIES			
Material	Casted PU (Polyurethane) with zinc coated integrated steel plate		
Hardness	Shore A - 90		
Tear, cut and abrasion resistance	Outstanding		
Exposure to light	Excellent (UV resistant)		
Seawater resistance	Excellent		
Oil and gasoline solvent resistance	Excellent		
Chemical resistance	Excellent. For specific chemicals, ask your local sales office.		
Robustness	Extremely robust with internal thick steel reinforcement plate		
STANDARD COLOURS			
Bumper	Standard: Black RAL 9005		
SIZE AND PROPERTIES			
Product dimensions	Width: 246 mm Depth: 102 mm Height: 442 mm		
Gross weight	9,216 kg		
Packaging dimensions	470 mm x 270 mm x 100 mm		
Number of fixations	2 pcs (included)		
FIXATIONS			
		ZC (Zinc coated)	SS (Stainless steel)
STANDARD	Concrete screw	 Ø17mm x 130mm	Not available

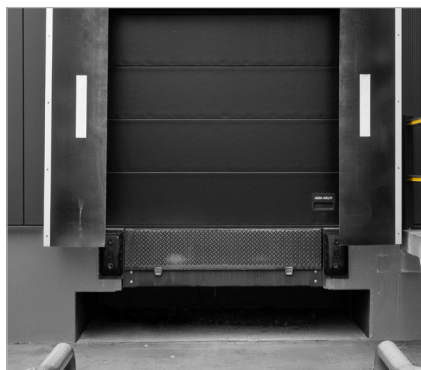

**REFERENCE LIST - DOCK BUMPER**

DB1450-0250-100BL Dock Bumper - 442x246x102mm - BL

