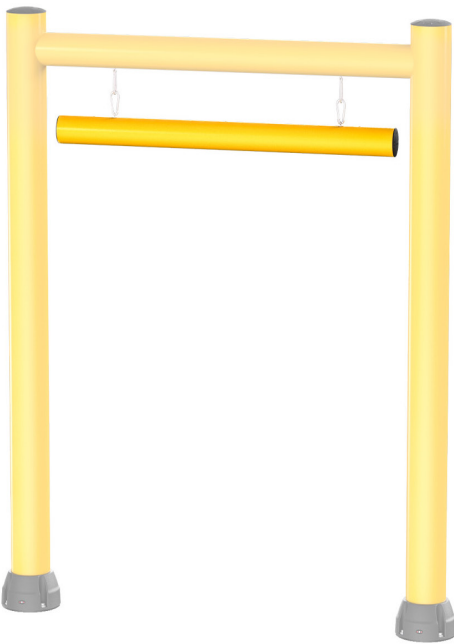


TOUCH BARRIER

BOLLARDS AND HEIGHT RESTRICTORS

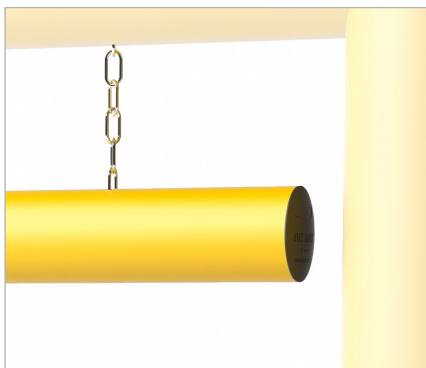
Revision: 13 January 2026 8:44 AM
Boplan reference: GP...



PRODUCT SPECIFICATIONS

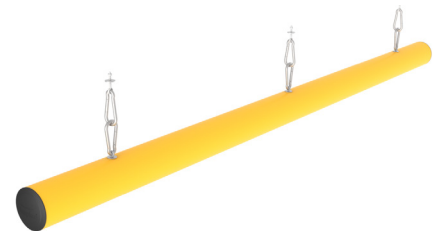

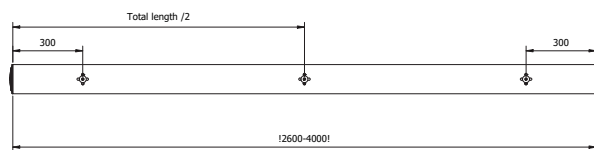
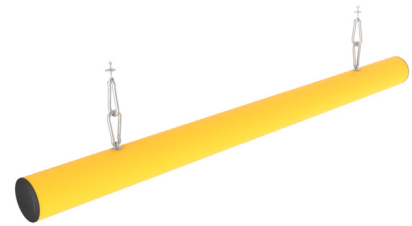

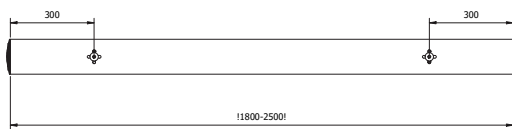
APPLICATION	
Protection	Cost effective solution for the protection of gates, canopies and bridges from collisions with high vehicles, such as elevated work platforms, trucks and buses.
MATERIAL	
Rail	Extrilene® - UV resistant - Fire class E* - Non conductive - Impervious to most chemicals**
Caps	Sustainable elastomer
Mounting chain	Steel + electro plating
STANDARD COLOURS	
Rail	Yellow RAL 1003
SIZE	
Rail length	Min. 1800 - max. 4000 mm
Profile section rail	Ø125 mm (10 mm thick)
REQUIREMENTS	
Operational temp.	-10°C up to +40°C
Water and humidity	Zinc coated: outdoor use in most environments.


*Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.
**Ask your local sales office for resistance to specific chemicals.



REFERENCE LIST - TOUCH BARRIER
TOUCH BARRIER

Touch barrier - 1800-2500mm	GP1251-2500-TB00YE
Touch barrier - 2501-4000mm	GP1251-4000-TB00YE


MOUNTING OPTIONS

Goal Post - Chain - linear meter	GP0099-0003-CHZC	
Goal Post - Wall connection 1000x500mm + chain 1000mm - BL	GP0099-0002-WCP0BL	