

FLIP200F PLUS

KICK RAILS AND WHEEL STOPS


Revision: 29 April 2026 8:59 AM
Boplan reference: PL2300...

PRODUCT SPECIFICATIONS




APPLICATION	
Environment	Ground level protection + Handrail system Create walkways and protect pedestrians from pallet trucks, lift trucks, forklifts or other vehicles. The plinth profile prevents goods or pallets sliding under the rails and hitting pedestrians or causing damage to machines or equipment.
MATERIAL	
Connection pieces / Rails	Extrilene® - UV resistant - Fire class E ⁺ - Non conductive - Impervious to most chemicals***
(End) Caps	Sustainable elastomer
STANDARD COLOURS	
Plinth Profiles	Yellow/Black - Black/Yellow (Yellow RAL 1003 & Black RAL 9005)
Handrail	Yellow/Black (Yellow RAL 1003 & Black RAL 9005)

*Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.

**Ask your local sales office for resistance to specific chemicals.

FIXATIONS			
		ZC (Zinc coated)	SS (Stainless steel)
STANDARD	Concrete screw	 Ø17mm x 130mm	Not available

The anchors specified in this document are metric. Imperial anchors are available on demand.

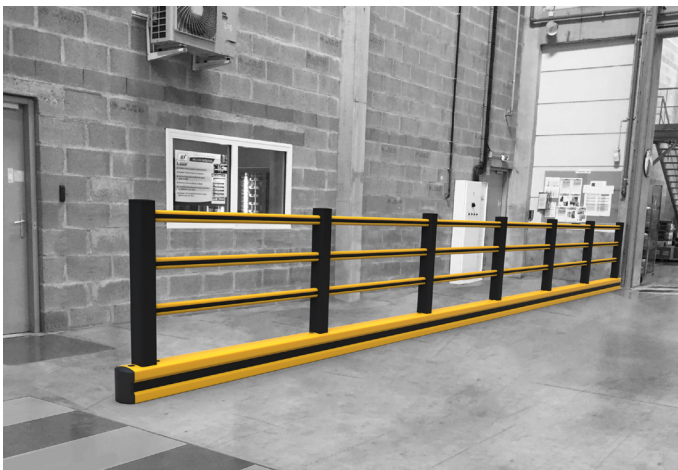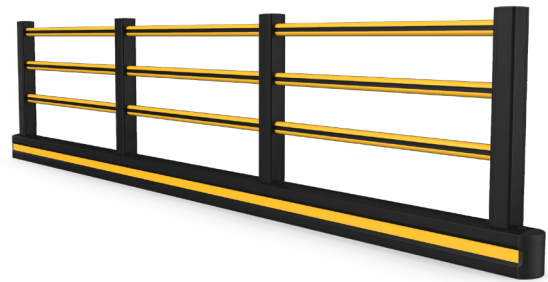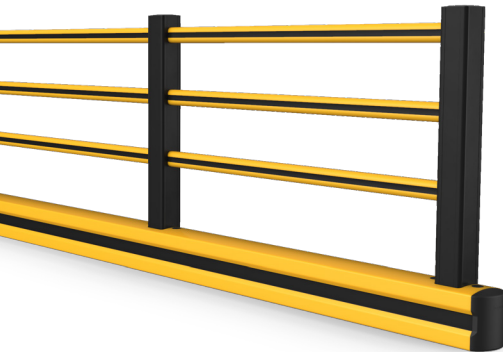

FEATURES AND FUNCTIONALITY - FLIP200F PLUS

boplan IMPACT LABEL FOR SAFETY BARRIERS


BOPLAN FLIP200F PLUS

IMPACT RATING	45°	90°
E50 < 50 kJ		
E40 < 40kJ		
E30 < 30kJ		
E25 < 25kJ		
E20 < 20kJ	21.5kJ	
E15 < 15kJ		15.2kJ
E12 < 12kJ		
E10 < 10kJ		
E7 < 7.5kJ		
E5 < 5.0kJ		
E2 < 2.5kJ		
E1 < 1.0 kJ		

IMPACT RESULTS Deflection: At maximum impact energy D = 249 mm / 9.8 inch	SUCCESS CRITERIA VEHICLE STOPPED ASI (ACCELERATION SEVERITY INDEX) < 0.5
TEST CONDITIONS TEMPERATURE: 20°C / 68°F IMPACT HEIGHT: 125 mm / 4.9 Inch -> D: 249 mm / 9.8 Inch TEST FLOOR: CONCRETE SLAB C25/30 - 150 mm / 6 inch	BOPLAN TEST CENTRE Muizelstraat 12 8560 Moorsele Belgium
TEST VEHICLE: TYPE: BOPLAN IMPACT TEST VEHICLE WEIGHT: 3762 Kg / 8294 lbs SIZE (L x W x h): 3100 x 1100 x 1150 mm / 122 x 43 1/4 x 45 1/4 Inch CONTACT AREA, STEEL BUMPER WIDTH: 1000 mm / 39 1/4 Inch	
IL-PL2200-20260130	

SIZE	
Height plinth	205 mm
Profile section plinth	205 mm x 174 mm (10 mm thick)
Height posts	1150 mm
Profile section posts	112 mm x 112 mm (10 mm thick)
Profile section Handrails	50 mm x 70 mm (6 mm thick)
Standard rail length	see next page

REQUIREMENTS	
Floor	Industrial concrete, flat surface
Concrete quality	minimum C25/30
Concrete floor plate thickness (mm)	minimum 150
Operational temperature	-10°C up to +40°C
Water and humidity	Zinc coated fixations: indoor and outdoor use in most environments

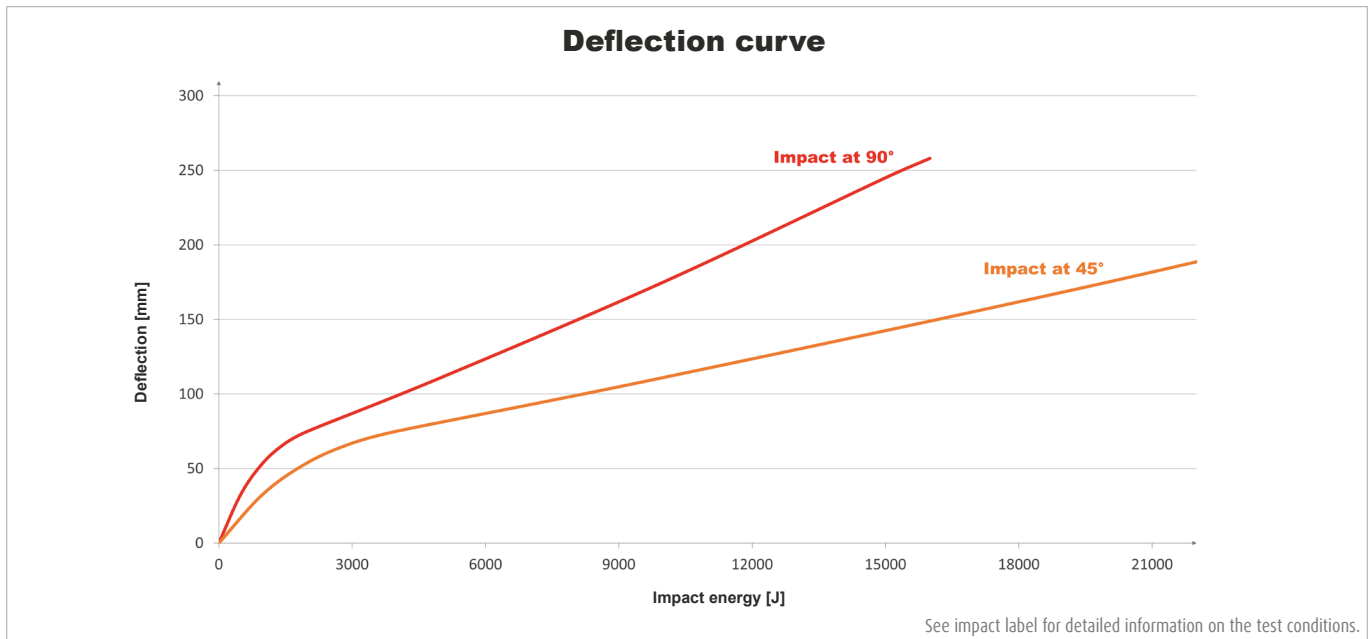


REFERENCE LIST - FLIP200F PLUS 3 RAILS

CONNECTION PIECES		
Endpost Yellow/Black 3R Endpost Black/Yellow 3R	PL2300-0001-EPYB PL2300-0001-EPBY	
Endpost Yellow/Black 3R Continu Endpost Black/Yellow 3R Continu	PL2300-0001-EPC3YB PL2300-0001-EPC3BY	
Midpost Yellow/Black 3R Midpost Black/Yellow 3R	PL2300-0001-MPYB PL2300-0001-MPBY	

RAIL SETS			
	Rail length	CC length	Reference
Standard rail	750 mm	1000 mm	PL2300-0750-1000YB
Standard rail	750 mm	1000 mm	PL2300-0750-1000BY
Standard rail	950 mm	1200 mm	PL2300-0950-1200YB
Standard rail	950 mm	1200 mm	PL2300-0950-1200BY
Standard rail	1150 mm	1400 mm	PL2300-1150-1400YB
Standard rail	1150 mm	1400 mm	PL2300-1150-1400BY
Standard rail	1350 mm	1600 mm	PL2300-1350-1600YB
Standard rail	1350 mm	1600 mm	PL2300-1350-1600BY
Standard rail	1550 mm	1800 mm	PL2300-1550-1800YB
Standard rail	1550 mm	1800 mm	PL2300-1550-1800BY
Standard rail	1750 mm	2000 mm	PL2300-1750-2000YB
Standard rail	1750 mm	2000 mm	PL2300-1750-2000BY
Corner rail	-	300 mm	PL2300-0300-C90YB
Non Std rail	400 - 1349 mm	650 - 1599 mm	PL2301-1599-SRYB
Non Std rail	400 - 1349 mm	650 - 1599 mm	PL2301-1599-SRBY
Non Std rail	1351 - 1750 mm	1601 - 2000 mm	PL2301-2000-LRYB
Non Std rail	1351 - 1750 mm	1601 - 2000 mm	PL2301-2000-LRBY

The impact performance has not been tested for tube lengths >1400 mm.
Only use longer lengths for non - critical applications.

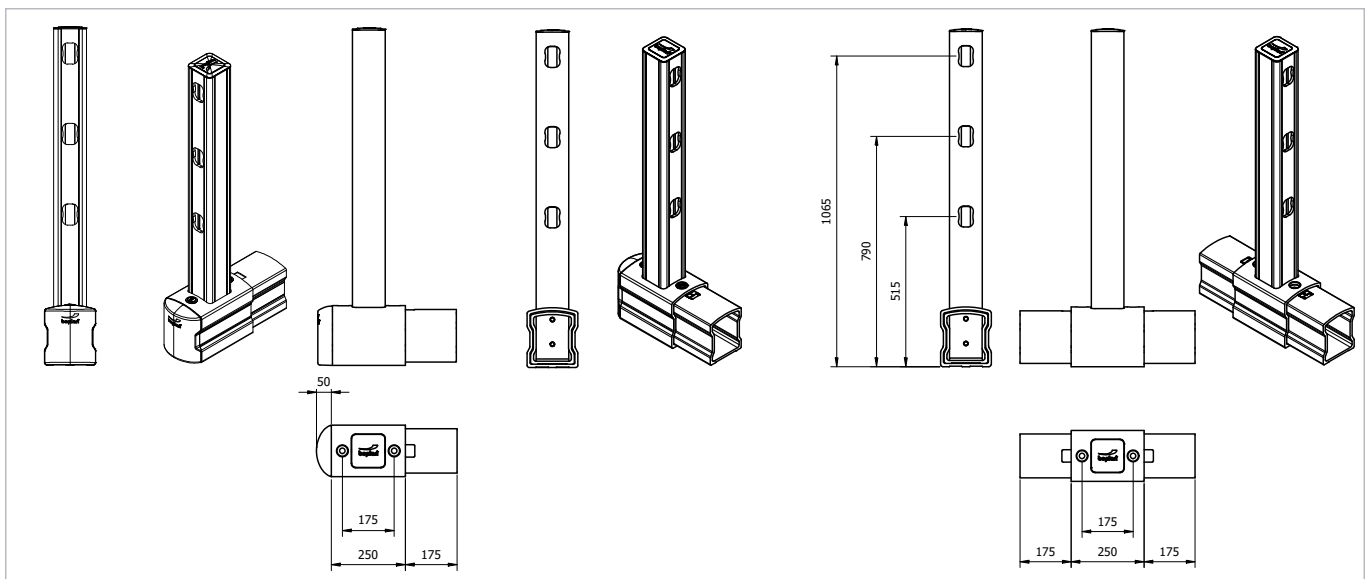


REFERENCE LIST - FLIP200F PLUS 2 RAILS

CONNECTION PIECES		
Endpost Yellow/Black 2R Endpost Black/Yellow 2R	PL2200-0001-EPYB PL2200-0001-EPBY	
Endpost Yellow/Black 2R Continú Endpost Black/Yellow 2R Continú	PL2200-0001-EPC2YB PL2200-0001-EPC2BY	
Midpost Yellow/Black 2R Midpost Black/Yellow 2R	PL2200-0001-MPYB PL2200-0001-MPBY	

RAIL SETS			
	Rail length	CC length	Reference
Standard rail	750 mm	1000 mm	PL2200-0750-1000YB
Standard rail	750 mm	1000 mm	PL2200-0750-1000BY
Standard rail	950 mm	1200 mm	PL2200-0950-1200YB
Standard rail	950 mm	1200 mm	PL2200-0950-1200BY
Standard rail	1150 mm	1400 mm	PL2200-1150-1400YB
Standard rail	1150 mm	1400 mm	PL2200-1150-1400BY
Standard rail	1350 mm	1600 mm	PL2200-1350-1600YB
Standard rail	1350 mm	1600 mm	PL2200-1350-1600BY
Standard rail	1550 mm	1800 mm	PL2200-1550-1800YB
Standard rail	1550 mm	1800 mm	PL2200-1550-1800BY
Standard rail	1750 mm	2000 mm	PL2200-1750-2000YB
Standard rail	1750 mm	2000 mm	PL2200-1750-2000BY
Corner rail	-	300 mm	PL2200-0300-C90YB
Non Std rail	400 - 1349 mm	650 - 1599 mm	PL2201-1599-SRYB
Non Std rail	400 - 1349 mm	650 - 1599 mm	PL2201-1599-SRBY
Non Std rail	1351 - 1750 mm	1601 - 2000 mm	PL2201-2000-LRYB
Non Std rail	1351 - 1750 mm	1601 - 2000 mm	PL2201-2000-LRBY

* The impact performance has not been tested for tube lengths >1400 mm.
Only use longer lengths for non - critical applications.

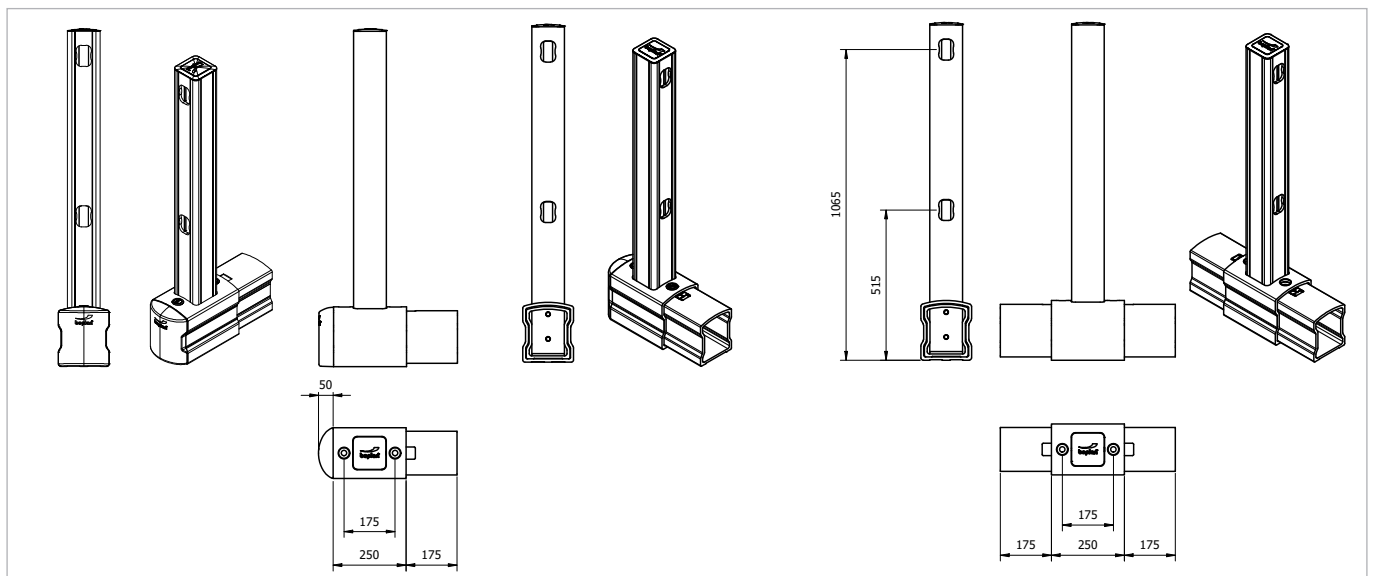

TECHNICAL DRAWING - FLIP200F PLUS

