


# RACKBULL

## RACK PROTECTION

Revision: 5 February 2025 1:08 PM  
Boplan reference: RPL-0600...

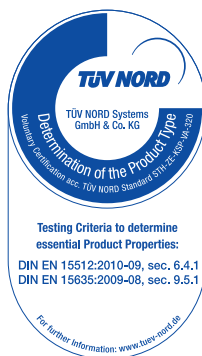


### PRODUCT SPECIFICATIONS





APPLICATION	
Environment	Optimal protection of the uprights of pallet racking systems against manoeuvring fork lifts. Absorbs multiple impacts without damaging the metal rack beam. Two versions available (Large and X-Large) for compatibility with most metal rack beams.
Impact performance at 90°	400 Joule
MATERIAL	
Rackbull	Polyethylene - UV resistant - Fire class E <sup>+</sup> - Non conductive - Impervious to most chemicals <sup>**</sup>
STANDARD COLOURS	
Rackbull	Yellow RAL 1003
FIXATION	
Installation	Snap over the metal rack beam. Optional installation kit (not included) for easy installation. Possible to put multiple Rackbulls on top of each other.
Cable tie (not included)	Openings are present for fixation with cable tie
REQUIREMENTS	
Operational temperature	14°F up to 104°F
Indoor / Outdoor	Fit for indoor and outdoor use

<sup>\*</sup>Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.

<sup>\*\*</sup>Ask your local sales office for resistance to specific chemicals.



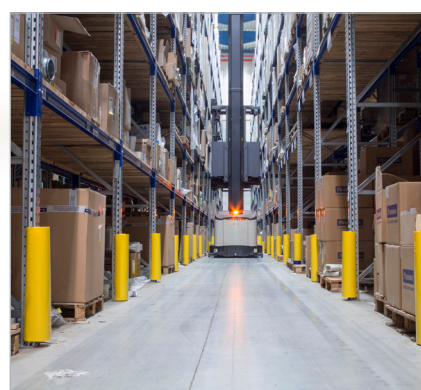




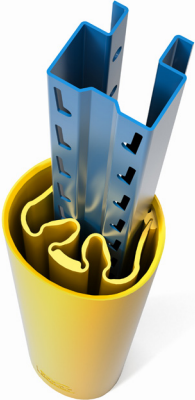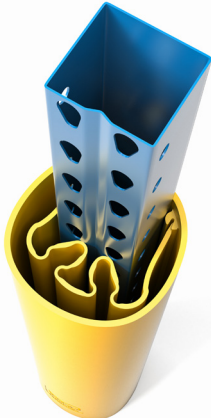








FEATURES AND FUNCTIONALITY - RACKBULL

SIZE		
	RACKBULL Large	RACKBULL X-Large
Dimensions Rackbull	23 2/3 x 5 2/3 x 5 in	23 2/3 x 5 3/4 x 6 in
Weight Rackbull	3.5 lbs	4.5 lbs
		
		
Rack leg dimensions	width : 3 - 4 1/3 in depth: 1 2/5 - 1 7/9 in	width : 3 - 4 1/3 in depth: 2 3/4 - 3 1/5 in

IMPACT PERFORMANCE - RACKBULL		
Test conditions	Ambient temperature	68°F
	Description of test	A metal blade of 40 kg falls from 3 ft on the Rackbull assembled on a metal rack upright.
	Success criteria	The metal rack upright does not show a deformation of more than 1/6 in.
Certification	TÜV NORD Voluntary Test according to DIN EN 15512 chapter 6.4.1 / 1326KU221910 / 8120512356-T04	
Impact Energy	400 Joule	

## REFERENCE LIST - RACKBULL

RPL-0600-35YE	RackBull L protector Yellow			
RPXL-0600-70YE	RackBull XL protector Yellow			 Opening for cable tie
RPIK-0001-S200	RackBull installation kit (2 handles included)			
RP099-0001-0001	Universal Impact PE Foam for Rackbull L/XL			
RP099-0001-0003	PE Foam cap for Rackbull L			
RP009-LOGO-1C	Rackbull logo print 1 color max 2 x 2 3/4 in			
RP009-LOGO-2C	Rackbull logo print 2 colors max 2 x 2 3/4 in			
RP009-LOGO-STUC1C	Rackbull logo print- startup cost -1 color			
RP009-LOGO-STUC2C	Rackbull logo print -startup cost - 2 colors			