

FLIP120L

KICK RAILS AND WHEEL STOPS

Revision: 4 November 2024 8:25 AM
Boplan reference: PL1210...







PRODUCT SPECIFICATIONS

APPLICATION	
Environment	<ul style="list-style-type: none"> Ground level protection Wall protection (refrigerator walls, decorative walls, sandwich panels) Wheel guide for pallet trucks or trolleys in busy traffic lanes Protection of machines and infrastructure Below a Boplan traffic barrier system Indoor and outdoor use Food Industry
MATERIAL	
Plinth	Extrilene® - UV resistant - Fire class E ⁺ - Non conductive - Impervious to most chemicals ^{**}
Endcap	Sustainable elastomer
STANDARD COLOURS	
Plinth	Yellow/Black - Black/Yellow (Yellow RAL 1003 & Black RAL 9005)





⁺Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.

^{**}Ask your local sales office for resistance to specific chemicals.

		FIXATIONS		
		ZC (Zinc coated)	SS (Stainless steel)	
STANDARD	Concrete screw		Ø12mm x 100mm	Not available
	Anchor rod (Chemical)		M12 x 120mm + Chemical resin	M12 x 120mm + Chemical resin
ALTERNATIVES	Wedge Anchor		M12 x 120mm	Not available
	Asphalt anchor		Bolt M10 x 40mm + Screw Ø16mm	Not available




FEATURES AND FUNCTIONALITY - FLIP120L

 IMPACT LABEL FOR SAFETY BARRIERS																																																		
BOPLAN FLIP120L 																																																		
IMPACT RATING	45°	90°																																																
<table border="0"> <tr><td>E50</td><td>< 50 kJ</td><td></td><td></td></tr> <tr><td>E40</td><td>< 40kJ</td><td></td><td></td></tr> <tr><td>E30</td><td>< 30kJ</td><td></td><td></td></tr> <tr><td>E25</td><td>< 25kJ</td><td></td><td></td></tr> <tr><td>E20</td><td>< 20kJ</td><td></td><td></td></tr> <tr><td>E15</td><td>< 15kJ</td><td></td><td></td></tr> <tr><td>E12</td><td>< 12kJ</td><td></td><td></td></tr> <tr><td>E10</td><td>< 10kJ</td><td></td><td></td></tr> <tr><td>E7</td><td>< 7.5kJ</td><td></td><td></td></tr> <tr><td>E5</td><td>< 5.0kJ</td><td>5.3kJ</td><td>4.2kJ</td></tr> <tr><td>E2</td><td>< 2.5kJ</td><td></td><td></td></tr> <tr><td>E1</td><td>< 1.0 kJ</td><td></td><td></td></tr> </table>	E50	< 50 kJ			E40	< 40kJ			E30	< 30kJ			E25	< 25kJ			E20	< 20kJ			E15	< 15kJ			E12	< 12kJ			E10	< 10kJ			E7	< 7.5kJ			E5	< 5.0kJ	5.3kJ	4.2kJ	E2	< 2.5kJ			E1	< 1.0 kJ				
E50	< 50 kJ																																																	
E40	< 40kJ																																																	
E30	< 30kJ																																																	
E25	< 25kJ																																																	
E20	< 20kJ																																																	
E15	< 15kJ																																																	
E12	< 12kJ																																																	
E10	< 10kJ																																																	
E7	< 7.5kJ																																																	
E5	< 5.0kJ	5.3kJ	4.2kJ																																															
E2	< 2.5kJ																																																	
E1	< 1.0 kJ																																																	
IMPACT RESULTS Deflection: At maximum impact energy	 D= 235 mm / 9.25 inch	SUCCESS CRITERIA VEHICLE STOPPED ASI (ACCELERATION SEVERITY INDEX) <0.5																																																
TEST CONDITIONS TEMPERATURE: 20°C / 68°F IMPACT HEIGHT: 88 mm / 3.46 Inch → D: 235 mm / 9.25 Inch TEST FLOOR: CONCRETE SLAB C25/30 - 150 mm / 6 Inch	BOPLAN TEST LAB Muizelstraat 12 8560 Moorsele Belgium 																																																	
TEST VEHICLE: TYPE: BOPLAN IMPACT TEST VEHICLE WEIGHT: 3775 Kg / 8322.45 lbs SIZE (L x W x h): 3100 x 1100 x 1150 mm / 122 x 43 1/4 x 45 1/4 Inch CONTACT AREA, STEEL BUMPER WIDTH: 1000 mm / 39 1/4 Inch	IL-PL121-20240711																																																	

SIZE	
Height	120 mm
Profile section	120 mm x 120 mm (10 mm thick)
Standard rail length	1000 mm - 2000 mm - 3000 mm (other sizes: 500 - 2999 mm)

REQUIREMENTS	
Concrete quality	minimum C25/30
Concrete floor plate thickness	minimum 150 mm
Operational temperature	-10°C up to +40°C
Water and humidity	Zinc coated fixations: indoor and outdoor use in most environments

REFERENCE LIST - FLIP 120		
	YELLOW/Black	BLACK/Yellow
500mm (2fix)	PL1210-0500-0001YB	PL1210-0500-0001BY
1000mm (2fix)	PL1210-1000-0001YB	PL1210-1000-0001BY
2000mm (3fix)	PL1210-2000-0001YB	PL1210-2000-0001BY
3000mm (4fix)	PL1210-3000-0001YB	PL1210-3000-0001BY
501-1300mm (2fix)	PL1211-1300-0001YB	PL1211-1300-0001BY
1301-2200mm (3fix)	PL1211-2200-0001YB	PL1211-2200-0001BY
2201-2999mm (4fix)	PL1211-2999-0001YB	PL1211-2999-0001BY

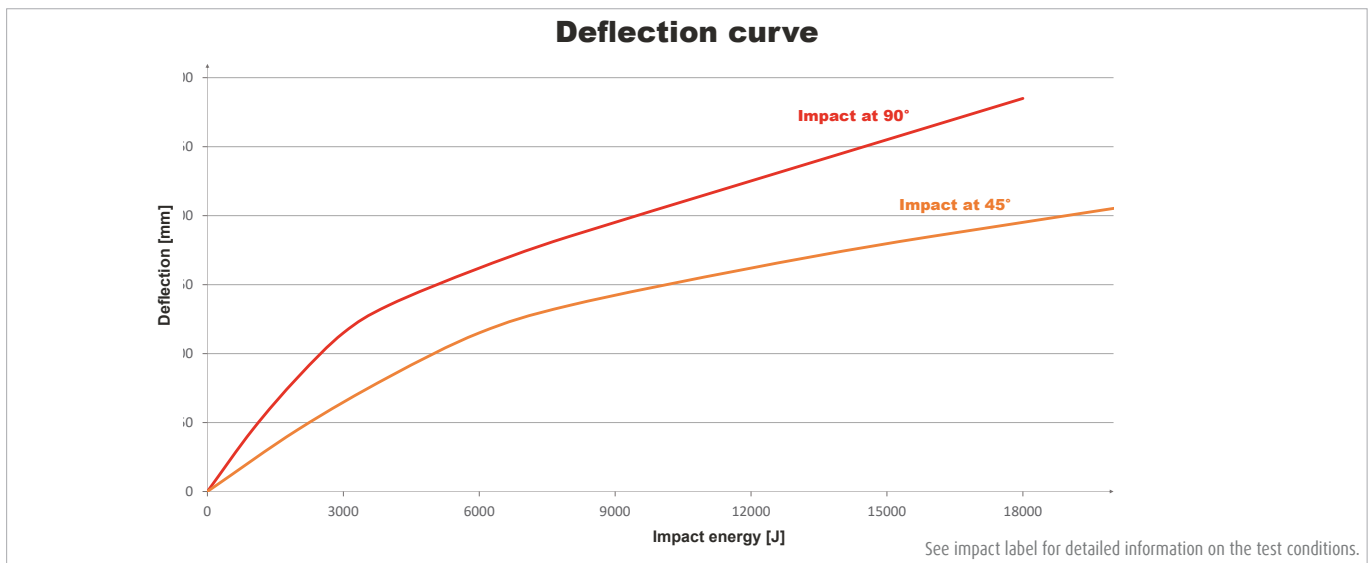

TECHNICAL DRAWING - FLIP120L

