



**READY
FOR
IMPACT**



HEIGHT RESTRICTORS

**PROTECTION OF INFRASTRUCTURE FROM
FORKLIFTS AND TALL VEHICLES**

HEIGHT RESTRICTORS

PROTECTION OF INFRASTRUCTURE FROM FORKLIFTS AND TALL VEHICLES



GOAL POST height restrictors from our FLEX IMPACT® range are flexible height restrictors that protect your gates, canopies and bridges from collisions with tall vehicles such as boom lifts, trucks and forklifts with high loads. A GOAL POST consists of a portal and an optional separate bar or TOUCH BARRIER. The GOAL POST is available in custom sizes and in a variety of colours. For more stability, the height restrictor can be secured to a wall using brackets.

Height restrictors are safety solutions that prevent collisions with high obstacles. They consist of a high horizontal bar supported by two vertical bollards. Their presence prevents damage to your company's infrastructure and to the vehicles themselves. We often install them at entrances and gates of warehouses, factories and loading docks, as these are most vulnerable to impacts at height.




ICE FLEX®

The GOAL POST is also available in a version for use at temperatures below freezing down to -30°C.



FOR MORE STABILITY, WE SECURE HEIGHT RESTRICTORS OVER 4 METRES HIGH TO A WALL USING BRACKETS



FLEX IMPACT® HEIGHT RESTRICTORS



A revolutionary base plate

An optimised base plate increases impact resistance. The Base Defender protects the screws that anchor the round base plate to the floor. This protective cover, made of durable elastomer, makes it physically impossible to drive over the base plate and damage the screws. The Base Defender is wider than the bollard. This creates a free space and prevents crushed fingers.



Stronger than ever

The GOAL POST features EXTRILENE® tubes of various lengths bolted to a base plate. The different tubes provide optimal impact absorption through deformation and friction.

Easy to customise and expand

Our height restrictors are easily combined with other FLEX IMPACT® safety products such as safety gates, handrails and bollards.



IMPACT-RESISTANT AND FLEXIBLE

Our height restrictors are made of EXTRILENE®, a high-quality polymer. This material is ideal for absorbing heavy impacts. Crash tests have demonstrated that our GOAL POSTS can withstand impacts from 7.5 kJ to 10.2 kJ. The deformation that occurs after each collision disappears once the vehicle has gone.



EASY INSTALLATION DUE TO MODULAR DESIGN

Our GOAL POSTS are constructed using a minimum of components. Moreover, the polymer components are lightweight, making them easy to handle and transport.



RESISTANT TO CHEMICALS AND UV RADIATION

Our weather-resistant height restrictors are resistant to chemicals and do not rust. They are perfect for environments where chemicals are frequently used or where strict hygiene standards apply. Bacteria do not adhere to the polymer and it is easy to clean.



OPTIMAL VISIBILITY

The standard colour for these height restrictors is yellow. Yellow draws attention and increases safety awareness.



LOW MAINTENANCE

FLEX IMPACT® height restrictors require minimal maintenance. With proper use, our systems last a very long time.



FASTENERS

Concrete screws  STANDARD

Expansion anchors  OPTIONAL

TYPICAL ENVIRONMENTS

For the protection of gates, canopies, entrances and bridges in:

- Car parks
- Commercial properties
- Distribution centres
- Industrial properties
- Logistics, supply chain and material handling
- Petrochemical and chemical plants
- Transport & logistics centres
- Warehouses and storage facilities



BOPLAN TEST CENTRE

At our indoor test centre, we can run tests at any time, regardless of the weather or external factors. This controlled environment allows us to create repeatable conditions, ensuring accurate and precise results.

We meticulously simulate scenarios, from different floor conditions to impact angles, replicating the real-world challenges our GOAL POSTS face.



FLEX IMPACT® HEIGHT RESTRICTORS



GP GOAL POST 200B
7,5 kJ




2,000 - 4,000 mm

1,800 - 4,000 mm

GP GOAL POST 250R
10,2 kJ

2,000 - 6,000 mm

1,800 - 6,000 mm

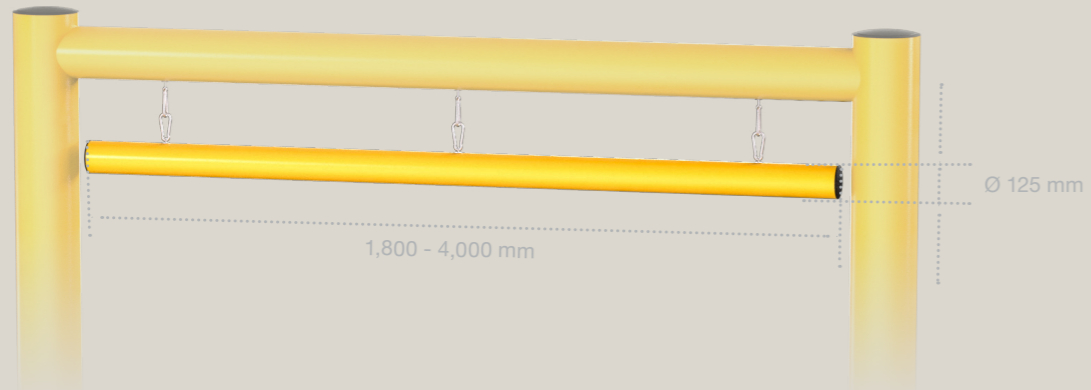

TOUCH BARRIER



GP GOAL POST
250R



**READY
FOR
IMPACT**

BOPLAN HQ

Muizelstraat 12
8560 Moorsele, Belgium
+32 56 20 64 20
info@boplan.com

BOPLAN UK

Science Centre, Wolverhampton Science Park
Glaisher Drive, Wolverhampton WV10 9RU
+44 1902 82 4280
info@boplan.co.uk

BOPLAN USA

4350 W. White Road, St 300
Flowery Branch, GA 30542
+1 678-890-5906
info@boplan.us

BOPLAN DEUTSCHLAND

IHP-Nord · Babenhäuser Str. 50
63762 Großostheim
+49 6026 999 51 90
info@boplan.de

BOPLAN FRANCE

617, Avenue de Bayonne
64210 Bidart
+33 (0)5 35 45 75 35
info@boplan.fr

BOPLAN ESPAÑA

Pl Ramon Berenguer el Gran, 1
08002 Barcelona
+34 936 81 66 88
info@boplan.es

BOPLAN NEDERLAND

Toermalijnring 100
3316 LC Dordrecht
+31 85 13 07 500
info@boplan.nl

BOPLAN POLSKA

Ul. Graniczna 34B / U16
41-300 Dąbrowa Górnicza
+48 728-878-670
info@boplan.pl

BOPLAN ITALIA

Via Privata Maria Teresa 7
20123 Milano
+32 56 20 64 20
info@boplan.it

BOPLAN JAPAN

4F Matsuoka II Building,
1-2-11 Nijyooji Minami
Nara City, Nara 630-8012
+81 (0)742-93-8705
info@boplan.co.jp

FOLLOW US



BOPLAN.COM

For more information about our products,
services and worldwide network

