

TOUCH BARRIER

BOLLARDS AND HEIGHT RESTRICTORS

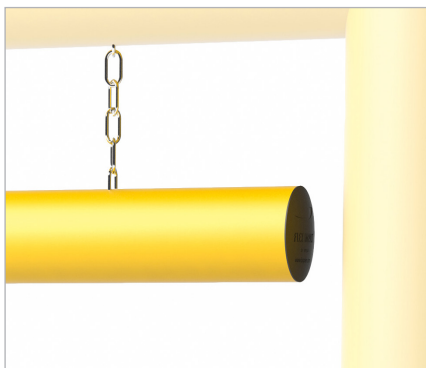
Revision: 18 February 2025 9:30 AM
Boplan reference: GP...



PRODUCT SPECIFICATIONS

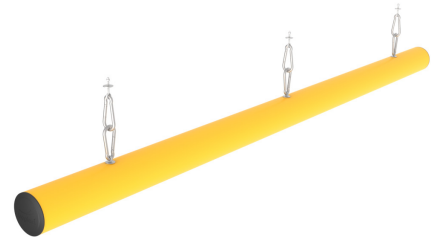

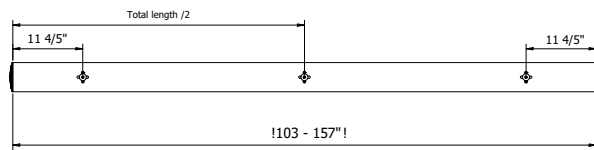
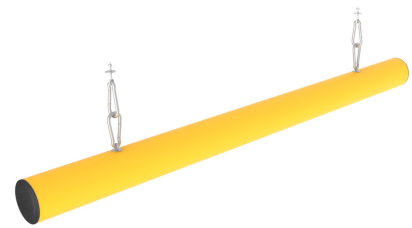

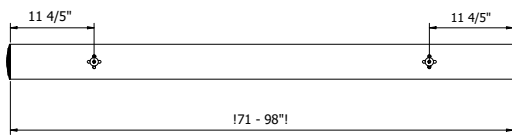
APPLICATION	
Protection	Cost effective solution for the protection of gates, canopies and bridges from collisions with high vehicles, such as elevated work platforms, trucks and buses.
MATERIAL	
Rail	Extrilene® - UV resistant - Fire class E* - Non conductive - Impervious to most chemicals**
Caps	Sustainable elastomer
Mounting chain	Steel + electro plating
STANDARD COLOURS	
Rail	Yellow RAL 1003
SIZE	
Rail length	Min. 71 - max. 157 in
Profile section rail	Ø5 in (2/5 in thick)
REQUIREMENTS	
Operational temp.	14 °F up to 104 °F
Water and humidity	Zinc coated: outdoor use in most environments.

*Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.
**Ask your local sales office for resistance to specific chemicals.



REFERENCE LIST - TOUCH BARRIER
TOUCH BARRIER

Touch barrier - 71-98 in	GP1251-2500-TB00YE
Touch barrier - 103-157in	GP1251-4000-TB00YE


MOUNTING OPTIONS

Goal Post - Chain - linear meter

GP0099-0003-CHZC



Goal Post - Wall connection + chain - 40x20 in - BL

GP0099-0002-WCP0BL

